

Spec Sheet

Genuine Comfort Through-The-Wall Air Conditioner

Unit size: 24-7/32" W x 14-1/2" H


FEATURES

- Digital controls
- Dehumidify Mode
- Energy Saver & Sleep Mode
- 24-Hour Programmable Timer
- Adjustable Air Louvres
- Three Indoor Fan Speeds
- Slide-Out Washable & Easy-Clean Filter
- Hand Held Remote Control (Included)
- Error Code Display For Easy Diagnostic
- Universal Thru-The-Wall Install Kit
- Genuine Care Warranty: 1-Year Unit Replacement




MODEL IDENTIFICATION

Example: **GCTTW-C10KA0-2**

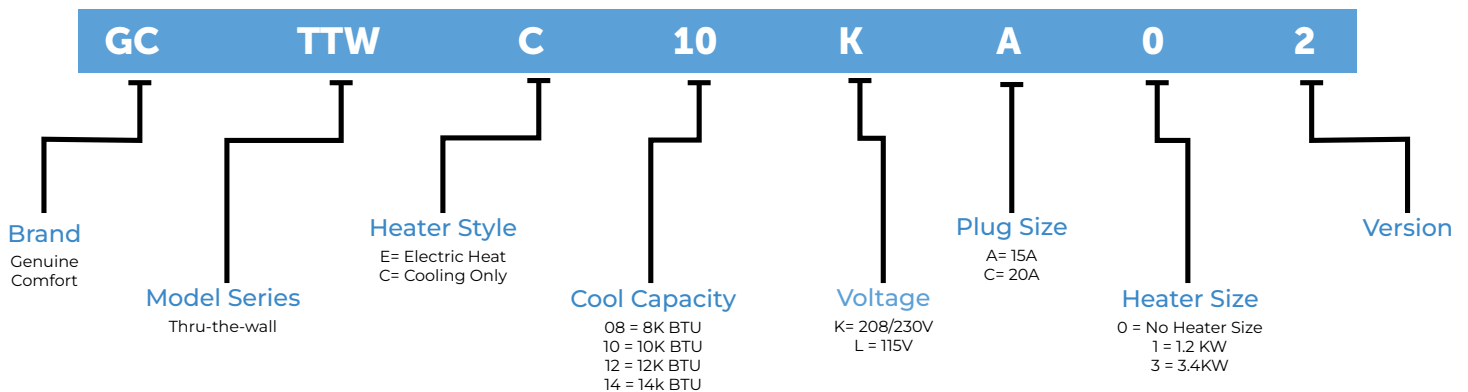

PLUG TYPE

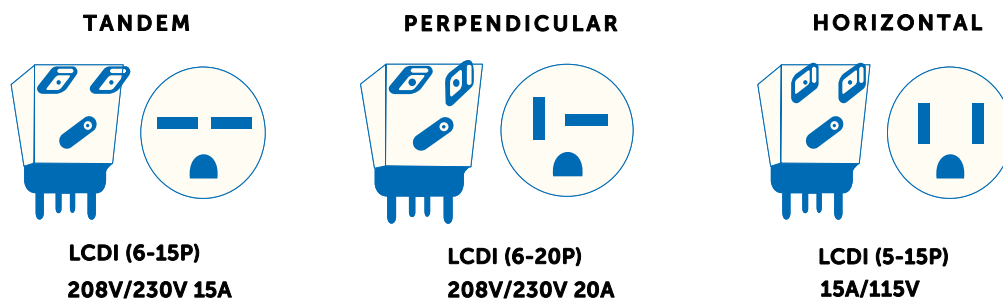

SPECIFICATIONS (COOLING W/ ELECTRIC HEAT)

Model ID			GCTTW-E08LA1-2	GCTTW-E10KC3-2	GCTTW-E12KC3-2
Power Supply	Voltage (1 Ph., 60Hz)	V	115	208/230	208 / 230
	Capacity	Btu/h	8,000	9,800/10,000	11,700/ 12,000
Cooling	Input	W	750	980/1000	1,160 / 1,180
		EER	10.7	10	10.5
	Capacity	(BTU/H)	4,200	8,600/10,600	8,600 / 10,600
Electric Heater	Power Input	W	1,220	2,821/3,450	2,821 / 3,450
	Amps	A	11	14/15	14 / 15
Max Input Consumption		W	1,350	3,450	3,450
Max Current		A	11	15	15
Indoor Air Flow (L/M/H)		CFM	192 / 227 / 258	241 / 263 / 285	230 / 251 / 273
Indoor Sound Level (L/M/H)		dB(a)	52 / 55.4 / 58.7	58 / 60.3 / 62.2	58 / 60 / 61.8
Outdoor Noise Level		dB (a)	63.5	66.3	65.4
Ambient Temp (Out-door)	Cooling	C°	18 - 43	18 - 43	18 - 43
	Cooling	F°	64 - 109	64 - 109	64 - 109
Unit Dimensions (W x D x H)		inch	24.21 * 20.28 * 14.53	24.21 * 20.28 * 14.53	24.21 * 20.28 * 14.53
Package Dimensions (W x D x H)		inch	27.95 * 26.57 * 16.93	27.95 * 26.57 * 16.93	27.95 * 26.57 * 16.93
Net Weight / Gross Weight		lbs	67 / 77	68 / 78	75 / 86
Refrigerant Type			R32	R32	R32
Cord Type			LCDI(5-15P)	LCDI(6-20P)	LCDI(6-20P)
Cord Length		Ft	5.6	5.6	5.6

SPECIFICATIONS (COOLING ONLY)

Model			GCTTW-C10LA0-2	GCTTW-C12LA0-2
Power Supply	Voltage (1 Ph., 60Hz)	V	115	115
	Capacity	Btu/h	10,000	12,000
Cooling	Input	W	930	1,140
		EER	10.6	10.5
Max Input Consumption		W	1,290	1,420
Max Current		A	12.9	14
Indoor Air Flow (L/M/H)		CFM	191 / 220 / 256	220 / 250 / 276
Indoor Sound Level (L/M/H)		dB(a)	50.2 / 52.8 / 55.8	55.3 / 56.8 / 59
Outdoor Noise Level		dB (a)	64.3	68.7
Ambient Temp (Outdoor)	Cooling	C°	18 - 43	18 - 43
	Cooling	F°	64 - 109	64 - 109
Unit Dimensions (W x D x H)		inch	24.21 * 20.28 * 14.53	24.21 * 20.28 * 14.53
Package Dimensions (W x D x H)		inch	27.95 * 26.57 * 16.93	27.95 * 26.57 * 16.93
Net Weight / Gross Weight		lbs	67 / 79	75 / 88
Refrigerant Type			R32	R32
Cord Type			LCDI(5-15P)	LCDI(5-15P)
Cord Length		Ft	7.02	7.02

SPECIFICATIONS (COOLING ONLY) (CONTINUED)

Model			GCTTW-C10KA0-2	GCTTW-C12KA0-2	GCTTW-C14KA0-2
Power Supply	Voltage (1 Ph., 60Hz)	V	208/230	208 / 230	208 / 230
	Capacity	Btu/h	10,200/10,500	11,700/ 12,000	13,600 / 1,400
Cooling	Input	W	940/970	1,110 / 1,140	1,360 / 1,400
		EER	10.6	10.5	9.5
Max Input Consumption		W	1,235	1,472	1,818
Max Current		A	6.7	7.9	9.7
Indoor Air Flow (L/M/H)		CFM	248 / 272 / 291	273 / 259 / 274	254 / 264 / 280
Indoor Sound Level (L/M/H)		dB(a)	55.7 / 57.9 / 59.4	57.5 / 59 / 60.2	58 / 59.5 / 60.5
Outdoor Noise Level		dB (a)	68.5	68.3	69.9
Ambient Temp (Outdoor)	Cooling	C°	18 - 43	18 - 43	18 - 43
	Cooling	F°	64 - 109	64 - 109	64 - 109
Unit Dimensions (W x D x H)		inch	24.21 * 20.28 * 14.53	24.21 * 20.28 * 14.53	24.21 * 20.28 * 14.53
Package Dimensions (W x D x H)		inch	27.95 * 26.57 * 16.93	27.95 * 26.57 * 16.93	27.95 * 26.57 * 16.93
Net Weight / Gross Weight		lbs	68 / 80	74 / 87	75 / 88
Refrigerant Type			R32	R32	R32
Cord Type			LCDI(6-15P)	LCDI(6-15P)	LCDI(6-15P)
Cord Length		Ft	6.5	6.5	6.5

Manufacturer reserves the right to change specifications. Our products are subject to continuous improvements. Genuine Comfort reserves the right to modify product design and specifications, discontinue design without notice and without incurring any obligations. Warranty limited to Canada and USA. See warranty documentation for full details.